

Superior Chemistry. Superior Performance.



HYDROSTATIC MV ISO 46 HYDRAULIC FLUID


MAG 1 Multi-Viscosity ISO 46 Hydraulic Fluid is designed to meet the performance requirements of most hydrostatic and hydraulic pump manufacturers.

Benefits Include:

- Provides outstanding thermal and oxidative stability
- Superior hydrolytic stability
- Excellent rust protection
- Demulsibility for extended equipment life

Recommended for the following applications:

- Skid-Steers hydrostats/hydraulics
- Lawn and Turf hydrostats/hydraulics
- Industrial hydraulic systems
- Hydraulic systems recommending a multi-viscosity oil
- Logging operations

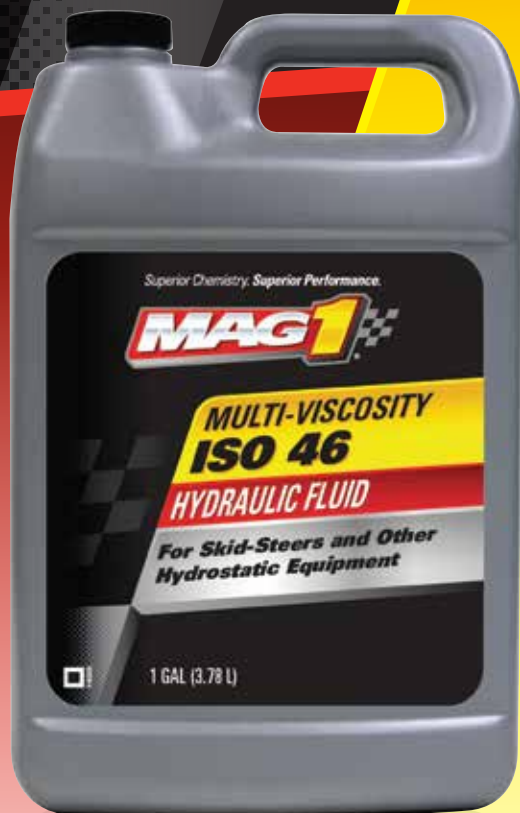

**Physical Specifications of MAG 1 Hydrostatic
MV ISO 46 Hydraulic Fluid**

| Method | Test | Typical Results |
|-------------|----------------------------------|-----------------|
| ASTM D287 | Gravity, °API | 31.50 |
| ASTM D4052 | Specific Gravity @ 60°F (15.6°C) | 0.8681 |
| ASTM D445 | Viscosity @ 40°C cSt | 43.93 |
| ASTM D445 | Viscosity @ 100°C cSt | 7.72 |
| ASTM D2270 | Viscosity Index | 146 |
| ASTM D5950 | Pour Point °C (°F) | -48°C (-54°F) |
| ASTM D 1500 | Color | 0.5 |

| Pack Size | Stock #/Item # | Each UPC | Case Dimensions | Case Cube/ Pallet Cube | Case Weight/ Pallet Weight | Pallet Stack |
|------------|------------------|-----------------|----------------------------------|---------------------------|-------------------------------|----------------------------|
| 4/1 Gallon | 63952 / MG42HS4P | 0 71621-63952 8 | L 15.875" x W 8.875" x H 12.500" | 1.019 / 61.111 | 32.664 / 1698.528 | 52 Eaches (4 layers of 13) |

